

Brake Calliper DH 10 FPM

spring-activated – pneumatically released



Advantages

- Safety brake; pressure is produced by spring force, opening with air pressure
- Manual adjustment to counter friction block wear
- Integrated pistons
- Surface areas protected against corrosion
- Friction blocks free from asbestos
- Swivel mounted friction blocks ensure full face contact on the brake disc

Technical Data

Article number: 4457.901.102


Compressed air connection:
L-shaped screw coupling
connector for outer
diameter 6 mm

Air pressure: min. 5 bar, max. 8 bar

Air consumption:
max. 3 cm³ per actuation

Weight: 1 kg

Thickness of brake disc: 12.5 mm

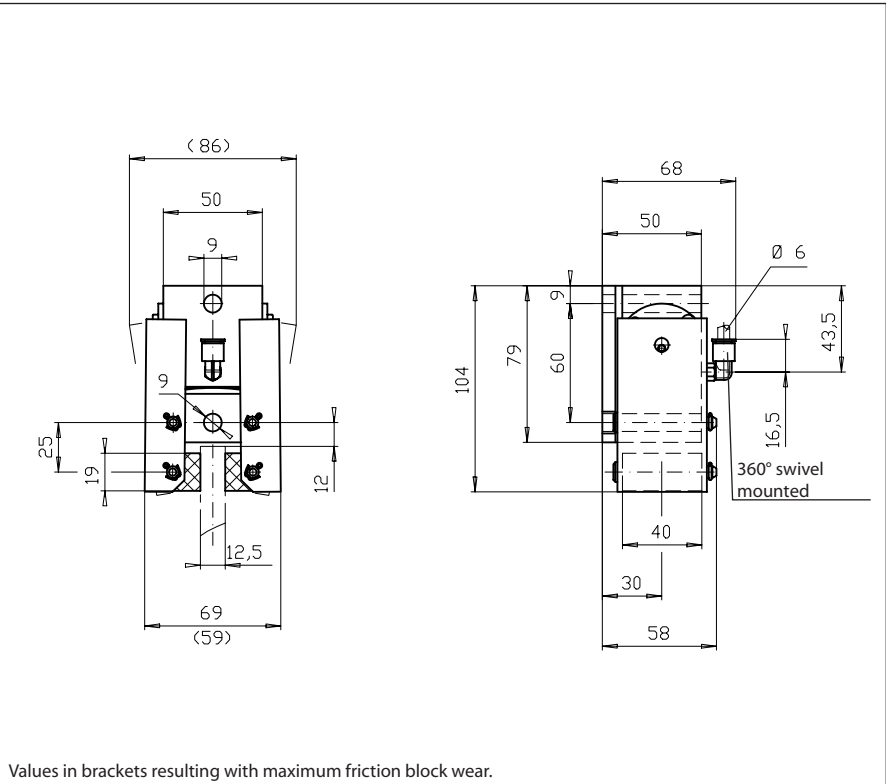

Brake disc diameter	Max. braking torque
mm	Nm
125	15
150	17
200	27
250	34
300	42
355	50